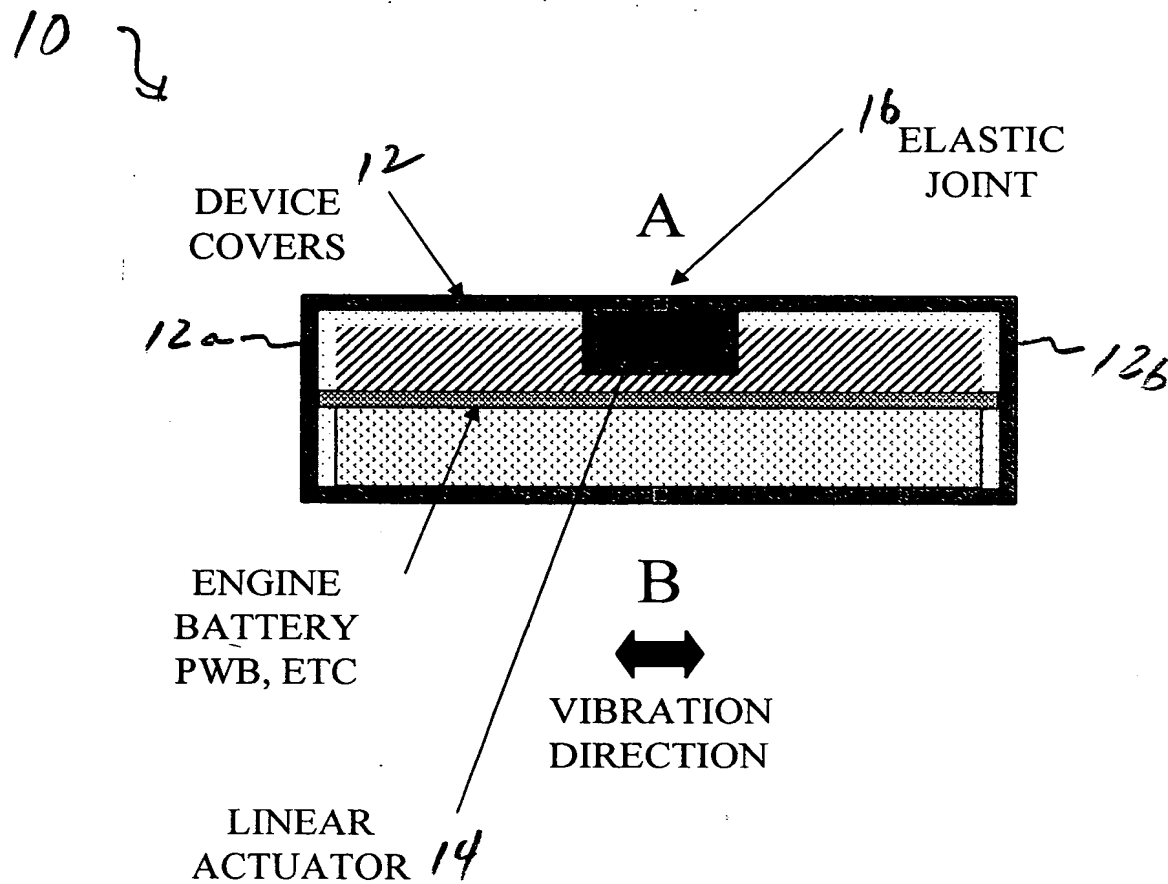


**Figure 1.** Principle of separating a device in two halves and joining them with elastic joint. Linear actuators are located near joint and are capable of creating vibration with halves.



**Figure 2.** Illustration of structure used to enable vibration creation. Linear actuators can create small amplitude vibration which is transmitted to half-covers.

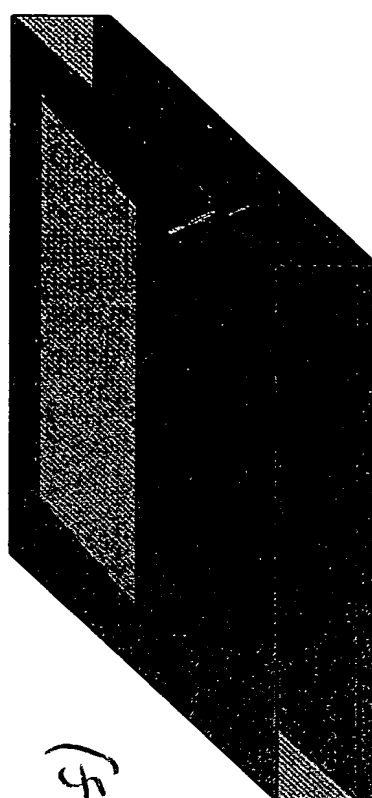
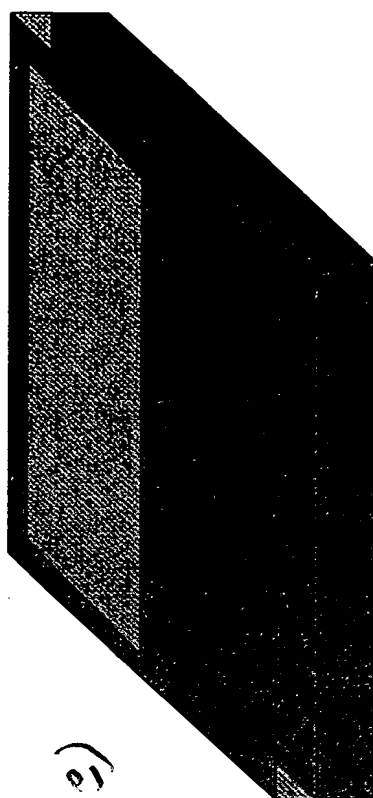
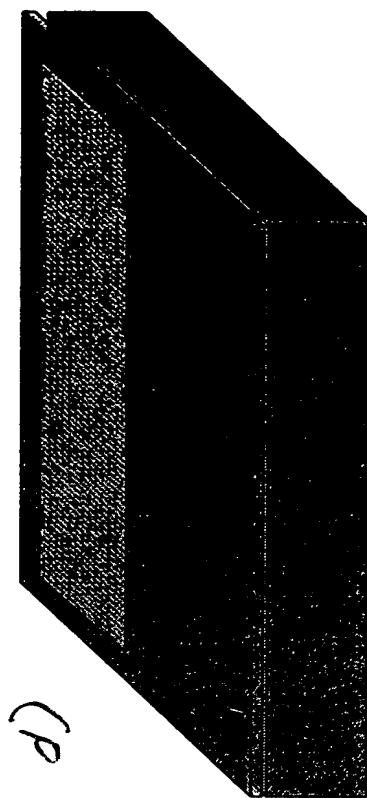
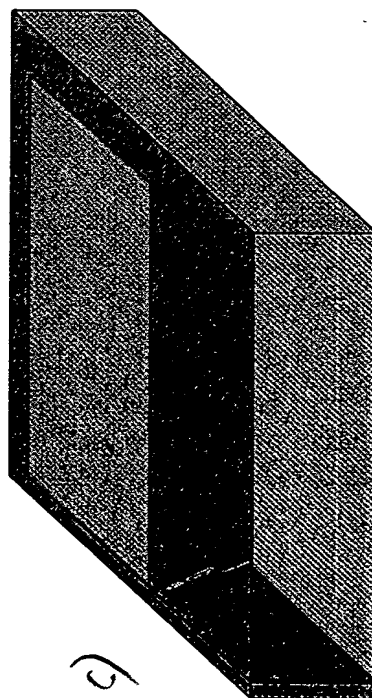
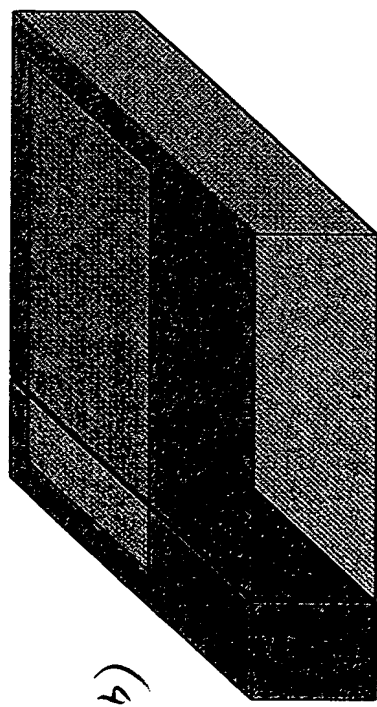
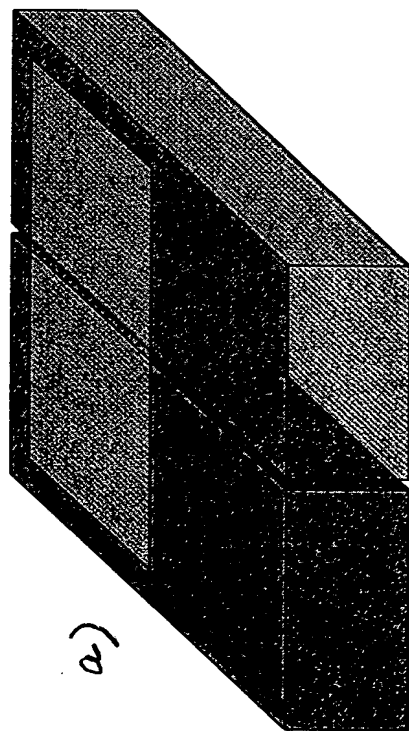


Figure 3. Alternate possibilities to cut product in two halves.